




ITEM NO.	Wire diameter (d)	DIMENSION (D)	MINI BREAK LOAD (kgf)
M-01-180	Ø0.5/0.6	SØ3.2	10
M-01-542	Ø0.6	SØ3.0	10
M-01-677	Ø0.6	SØ3.0	10
M-01-678	Ø0.6	SØ3.0	10
M-01-898	Ø0.6	SØ3.0	10
M-01-997	Ø0.6	SØ3.0	10
M-01-190	Ø0.7	SØ3.2	10
M-01-281	Ø0.7	SØ3.2	10
M-01-282	Ø0.7	SØ3.2	10
M-01-191	Ø0.7	SØ3.2	10
M-01-927	Ø0.5 coating Ø0.7	SØ3.2	10
M-01-447	Ø0.8	SØ3.0	10
M-01-840	Ø0.8	SØ3.0	10
M-01-1032	Ø0.8	SØ3.0	10
M-01-904	Ø0.8	SØ3.5	30
M-01-744	Ø0.8	SØ3.8	30
M-01-158	Ø0.8	SØ4.0	30
M-01-541	Ø0.8	SØ4.0	30
M-01-586	Ø0.8	SØ4.0	30
M-01-716	Ø0.8	SØ4.0*4.5	30
M-01-428	Ø0.8	SØ4.06	30
M-01-502	Ø0.8	SØ4.06	30
M-01-402	Ø0.8	SØ4.06	30
M-01-271	Ø0.8	SØ4.5	30
M-01-874	Ø0.9	SØ3.5	30

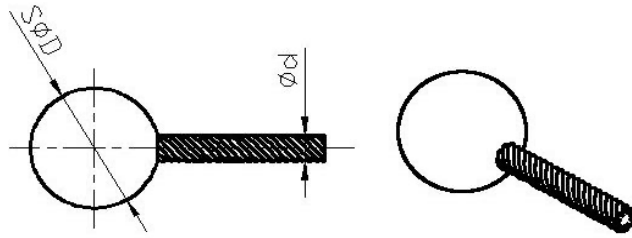

ITEM NO.	Wire diameter (d)	DIMENSION (D)	MINI BREAK LOAD (kgf)
M-01-862	Ø0.9	SØ3.8	50
M-01-145	Ø1.0	SØ3.0	30
M-01-155	Ø1.0	SØ3.8	50
M-01-204	Ø1.0	SØ3.5	50
M-01-486	Ø1.0	SØ3.9	50
M-01-499	Ø1.0	SØ3.9	50
M-01-050	Ø1.0	SØ3.9	50
M-01-036	Ø1.0	SØ4.0	50
M-01-982	Ø1.0	SØ4.0	50
M-01-850	Ø1.1	SØ4.1	50
M-01-353	Ø1.0	SØ4.06	50
M-01-370	Ø1.0 coating	SØ4.06	50
M-01-041	Ø1.0	SØ4.5	50
M-0-821	Ø1.0	SØ4.8	50
M-01-363	Ø1.0	SØ4.8	50
M-01-889	Ø1.0	SØ4.8	50
M-01-935	Ø1.0	SØ5.0	50
M-01-690	Ø1.1	SØ3.0	50
M-01-010	Ø1.2	SØ3.8	80
M-01-923	Ø1.2	SØ3.8	80
M-01-968	Ø1.2 coating	SØ3.8	80
M-01-624	Ø1.2 coating	SØ4.0	100
M-01-770	Ø1.2	SØ4.3	100
M-01-371	Ø1.2	SØ4.6	100
M-01-007	Ø1.2	SØ5.0	100

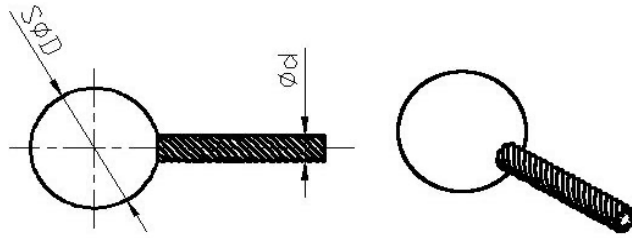

ITEM NO.	Wire diameter (d)	DIMENSION (D)	MINI BREAK LOAD (kgf)
M-01-505	Ø1.2	SØ4.8	100
M-01-594	Ø1.2	SØ4.8	100
M-01-847	Ø1.2	SØ4.8	100
M-01-399	Ø1.2	SØ6.0	100
M-01-392	Ø1.2	SØ7.4	100
M-01-241	Ø1.25	SØ5.0	100
M-01-848	Ø1.25	SØ5.0	100
M-01-423	Ø1.25	SØ5.5	100
M-01-615	Ø1.3	SØ4.8	120
M-01-807	Ø1.3	SØ4.8	120
M-01-325	Ø1.5	SØ3.8	150
M-01-325	Ø1.5	SØ3.47*3.47	150
M-01-422	Ø1.5	SØ4.4	150
M-01-132	Ø1.5	SØ4.8	150
M-01-308	Ø1.5 coating	SØ4.8 (4.9)	150
M-01-784	Ø1.5 coating	SØ4.8	150
M-01-785	Ø1.5 coating	SØ4.8	150
M-01-934	Ø1.5	SØ4.8	150
M-01-1023	Ø1.5	SØ4.8	150
M-01-1023-1	Ø1.5	SØ4.8	150
M-01-588改693	Ø1.5	SØ5.0	150
M-01-391	Ø1.5	SØ5.0*9.0	150
M-01-440	Ø1.5	SØ5.5	150
M-01-146	Ø1.5	SØ6.0	150
M-01-976	Ø1.5	SØ6.0	150

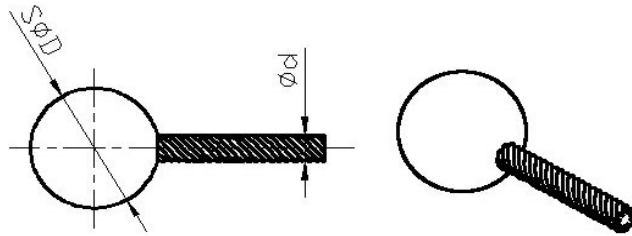

ITEM NO.	Wire diameter (d)	DIMENSION (D)	MINI BREAK LOAD (kgf)
M-01-984	Ø1.5	SØ6.0	150
M-01-455	Ø1.5	SØ6.8	150
M-01-073	Ø1.5	SØ7.5	150
M-01-553	Ø1.5	SØ7.6	150
M-01-686	Ø1.5	SØ7.6	150
M-01-612	Ø1.65 coating	SØ5-0.15	100
M-01-487	Ø1.8 coating	SØ4.9	250
M-01-033	Ø1.8	SØ6.8	250
M-01-223	Ø1.8	SØ8.0	250
M-01-409	Ø2.0	SØ6.5	250
M-01-210	Ø2.0	SØ7.5	280
M-01-178	Ø2.5	SØ6.0	400
M-01-068	Ø2.5	SØ8.2	400
M-01-215	Ø3.0 coating	SØ7.5	280
M-01-093	Ø3.2	SØ8.5*17.5	400
M-01-135	Ø3.2	SØ8.5*17.5	400
M-01-861	Ø3.0 coating Ø3.6	SØ9.3	500
M-01-645	Ø5.0	SØ13.0	1400
M-01-721	Ø5.0	SØ13.0	1400
M-01-476	Ø3.6	SØ12*14.0	500
M-01-670	Ø5.0	SØ10.0	
M-01-117	Ø5.0	SØ15.0	1400