


ITEM NO.	Wire diameter (d)	DIMENSION				MINI BREAK LOAD (kgf)
		D	D1	L	W	
M-01-127	Ø0.8	5	2.6	6.3	5	50
M-01-301	Ø0.8	5.36	2.6	6.3	5	50
M-01-394	Ø0.8	5.36	/	6.38	/	50
M-01-596	Ø0.8	5.36	/	6.38	/	50
M-01-1002	Ø0.8	5.36	/	6.38	/	50
M-01-1003	Ø0.8	5.36	/	6.38	/	50
M-01-186	Ø0.8	4	2.6	6.3	5	50
M-01-200	Ø0.8	4.3	2.75	6.35	5	50
M-01-201	Ø0.8	5.08	2.6	6.35	5	50
M-01-490	Ø0.8	/	/	6.35	5.36	
M-01-510	Ø0.8	/	/	6.35	5.36	50
M-01-215	Ø0.8			6.3	7.5	50
M-01-076	Ø1.0	4	2.6	6.3	5.0	80
M-01-378	Ø1.0	3.8	/	6.35	3.2	80
M-01-805	Ø1.0	5.36	/	6.38	/	50
M-01-043	Ø1.2	3.9	2.6	6	5.0	80
M-01-051	Ø1.2	3.7	3	9.5	5.2	80
M-01-108	Ø1.2	4.3	3	6.4	5.3	80
M-01-470	Ø1.2	/	/	7.5	3.0	80
M-01-432	Ø1.2	3.8	/	6.35	3.2	80
M-01-494	Ø1.2			3	7.5	80
M-01-547	Ø1.2	/	/	6.35	3.5	80
M-01-563	Ø1.2	/	/	7.5	3.0	80
M-01-535	Ø1.25	/	/	7.5	3.0	80

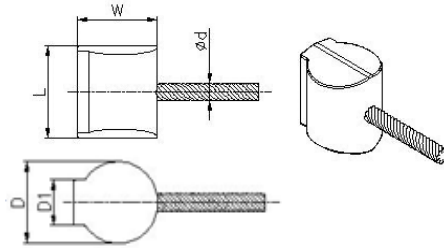

ITEM NO.	Wire diameter (d)	DIMENSION				MINI BREAK LOAD (kgf)
		D	D1	L	W	
M-01-515	Ø1.25		Ø5	6.4		
M-01-564	Ø1.25	/	/	7.5	3.5	80
M-01-562	Ø1.25	/	/	7.5	3.5	80
M-01-566	Ø1.25	/	/	6.35	5.36	80
M-01-1007	Ø1.5	Ø4.5	10	4.8		
M-01-1005	Ø1.5	Ø4.5	15			
M-01-286	Ø1.5	5.36	2.6	6.35	5	120
M-01-529	Ø1.5	6	/	9.585	5.5	120
M-01-288	Ø1.5	5.36		6.35		120
M-01-824	Ø1.5	6	3.2	6.4	5.5	120
M-01-459	Ø1.7 coating	/	/	9.5	5.5	180
M-01-589	Ø1.68	3.6	6.2	9.4	5.7	120
M-01-613	Ø1.65 coating	6.1	3.5	9.25	5.7	120