




ITEM NO.	Wire diameter (d)	DIMENSION					MINI BREAK LOAD (kgf)
		D	D1	L	L1	W	
M-01-639	Ø0.6	1.20	1.80	7.00	4.50	3.00	8
M-01-827	Ø0.6	1.20	1.80	7.00	4.50	3.00	8
M-01-114	Ø0.8	2.00	2.67	9.80	7.00	3.05	30
M-01-116	Ø0.8	2.00	2.67	9.80	6.70	3.05	30
M-01-269	Ø0.8	2.00	2.67	9.80	6.70	3.05	30
M-01-270	Ø0.8	2.00	2.67	9.80	6.70	3.05	30
M-01-126	Ø0.8	2.00	2.67	9.80	6.70	3.05	30
M-01-531	Ø0.8	2.00	3.30	9.80	6.70	3.05	30
M-01-540	Ø0.8	2.00	3.30	9.80	6.70	3.05	30
M-01-195	Ø0.8	2.00	2.67	9.80	6.70	3.05	30
M-01-299	Ø0.8	2.00	2.67	9.80	6.70	3.05	30
M-01-298	Ø0.8	2.00	2.67	9.80	6.70	3.05	30
M-01-267	Ø0.8	2.00	2.67	9.80	6.70	3.05	30
M-01-093	Ø0.8		3.30	9.80			30
M-01-637	Ø0.8		3.30	9.80			30
M-01-136	Ø0.8	2.00	3.00	9.50	6.70	3.05	30
M-01-046	Ø0.8	2.00	3.67	9.50	6.30	3.05	30
M-01-504	Ø0.8	2.00	/	10.00	/	/	30
M-01-027	Ø0.8	2.00	2.67	12.00	7.00	3.05	30
M-01-035	Ø0.8	2.00	2.67	12.00	7.00	3.05	30
M-01-091	Ø0.8	2.00	2.67	12.00	6.70	3.05	30
M-01-047	Ø1.2	2.70	2.70	14.80	10.50	3.05	30
M-01-013	Ø0.8	2.00	2.67	16.00	10.20	3.05	30

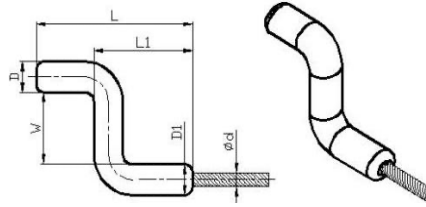

ITEM NO.	Wire diameter (d)	DIMENSION					MINI BREAK LOAD (kgf)
		D	D1	L	L1	W	
M-01-090	Ø0.8	2.00	2.67	16.50	10.30	3.05	30
M-01-107	Ø0.8	2.00	2.67	21.50	15.70	5.80	30
M-01-266	Ø1.0	2.00	3.00	16.00	10.20	8.40	40
M-01-028	Ø1.0	2.80	/	16.00	/	/	40
M-01-004	Ø1.0	3.00	3.00	21.50	14.50	7.00	50
M-01-335	Ø1.0	3.00	3.00	20.00	13.00	9.00	50
M-01-539	Ø1.0	2.00	3.30	17.50	14.40	3.90	50
M-01-272	Ø1.0	3.00	3.00	21.50	16.50	5.00	50
M-01-876	Ø1.0	3.25	2.70	13.50			50
M-01-634	Ø1.0	3.96	3.96	22.78	13.96	6.20	50
M-01-635	Ø1.0	3.96	3.96	22.78	17.34	8.94	50
M-01-262	Ø1.2	2.00	3.00	9.80	6.50	3.05	50
M-01-347	Ø1.2	4.20	4.20	21.80	10.80	3.60	150
M-01-454	Ø1.2	4.10	9.60	28.00	/	/	100
M-01-493	Ø1.2	4.10	/	20.50	/	4.00	100
M-01-498	Ø1.25	4.20	4.20	21.60	15.00	3.40	100
M-01-641	Ø1.25	3.80	3.80	21.40	14.80	4.20	100
M-01-648	Ø1.25	3.80	3.80	21.24	/	/	100
M-01-1021	Ø1.5	3.20		15.00		2.50	150
M-01-839	Ø1.5	3.90		15.60			150
M-01-469	Ø1.5	4.00	4.00	16.00	9.00	4.00	150
M-01-585	Ø1.5	4.00	/	13.00	/	/	150
M-01-768	Ø1.5	4.00	4.00	19.35	13.00	8.40	150

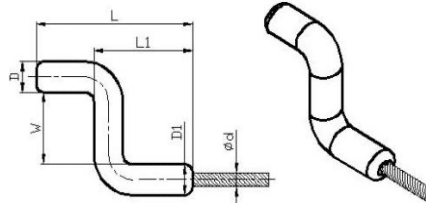

ITEM NO.	Wire diameter (d)	DIMENSION					MINI BREAK LOAD (kgf)
		D	D1	L	L1	W	
M-01-660	Ø1.5	4.00	/	26.70	/	/	150
M-01-901	Ø1.5	4.00		18.70			150
M-01-996	Ø1.5	4.06		20.83			
M-01-729	Ø1.5	4.80	4.00	20.00	16.30	2.50	150
M-01-348	Ø1.5	4.20	4.20	20.80	14.90	3.60	150
M-01-429	Ø1.5	4.20	4.20	22.80	15.40	4.10	150
M-01-501	Ø1.5	4.20	4.20	21.80	/	7.50	150
M-01-345	Ø1.5	4.40	4.40	21.93	15.40	3.50	150
M-01-971	Ø1.5	4.40	4.40	21.93	15.40	3.50	150
M-01-972	Ø1.5	4.40	4.40	21.93	15.40	3.50	150
M-01-741	Ø1.5	3.00	4.00	18.02	11.07	5.00	150
M-01-742	Ø1.5	3.00	4.00	22.30	14.88	5.00	150
M-01-870	Ø1.5	3.50	3.50	18.00	11.00		
M-01-871	Ø1.5	3.75	5.00	20.60			
M-01-916	Ø1.5	2.80		20.60			
M-01-787	Ø1.5	4.00	7.00	15.00	12.00	/	150
M-01-941	Ø1.5	4.00	8.60	12.00			
M-01-1006	Ø1.5	4.00		14.00			
M-01-973	Ø1.5	4.20		22.00			
M-01-974	Ø1.5	4.20		22.00			
M-01-885	Ø1.5	4.27	19.35				
M-01-1011	Ø1.5	4.27	19.35				
M-01-1012	Ø1.5	2.10	3.60	10.90	8.00	1.90	

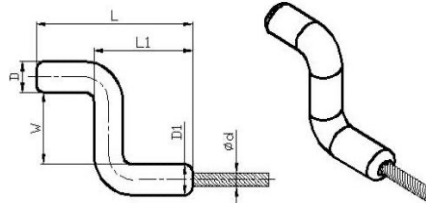

ITEM NO.	Wire diameter (d)	DIMENSION					MINI BREAK LOAD (kgf)
		D	D1	L	L1	W	
M-01-222	Ø1.8	5.00	5.00	22.70	12.00	13.00	200
M-01-467	Ø1.8	4.00	/	22.60	/	/	200
M-01-780	Ø1.5 coating Ø1.8	4.92		20.30	14.50		150
M-01-1004	Ø1.8	6.00		30.00			
M-01-448	Ø2.0	2.10	5.20	14.80	/	/	150
M-01-111	Ø2.0	4.20	4.20	22.00	11.20	4.00	150
M-01-435	Ø2.0	6.00	6.00	30.00	18.00	6.00	250
M-01-962	Ø2.5 coating	5.30		25.78			300
M-01-360	Ø2.5 coating	4.20	4.20	20.30	14.80	5.40	300
M-01-424	Ø2.5 coating	4.25	4.25	20.30	9.40	10.92	100
M-01-105	Ø4.0	5.80	4.30	29.80	22.80	6.50	250